

**Stable Doors – Data Sheet:**




With the aid of a false mullion and hidden gearing the residential door can be transformed into a traditional stable door.

**Specification: -**

- Top locking door equipped with round shoot bolt , soft latch and deadbolt with anti saw pins
- Bottom locking door equipped with round shoot bolt, deadbolt with anti saw pins and top shoot bolt to lock into upper door

**Operation**

- To open top door only (From Locked) Turn cylinder key (*top door*) to disengage shoot bolt and deadbolt, then use handle or key to disengage soft latch allowing top door to open independently.
- To open both doors as one (From Locked) first turn cylinder key to unlock bottom door, this will disengage shoot bolt and deadbolt but will engage upper shoot bolt locking both doors together. Open top door as above thus allowing both doors to act as one
- For security it is important to always lock bottom as well as top door sash

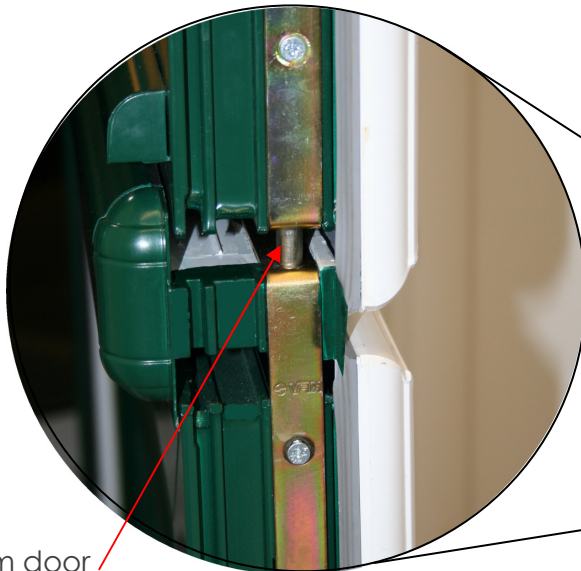

Top and Bottom door lock together with a shoot bolt



Key locking operation only on bottom door